动臂塔式起重机

Luffing Tower Crane

QD6038-18T

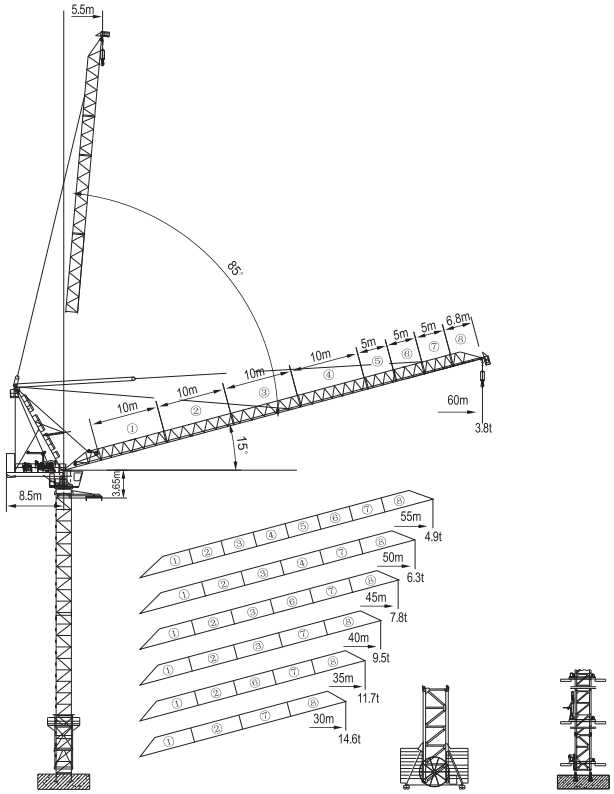

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L69B2 (2x2x3m)

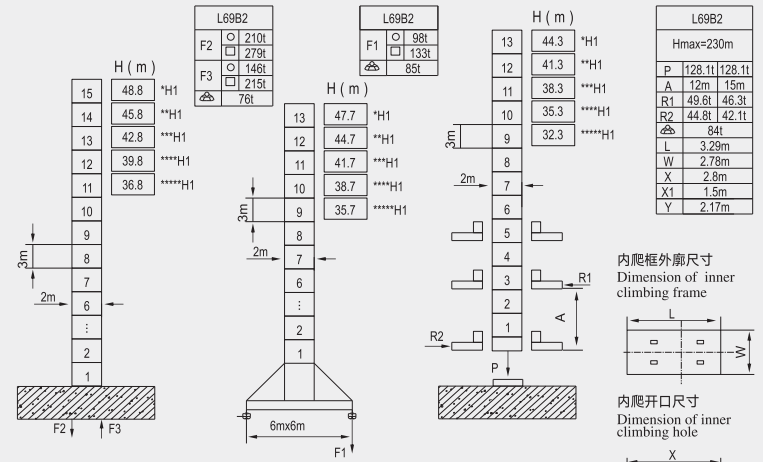

H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib	*40m	**45m	***50m	****55m	*****60m

○ 工作状态 In service

□ 非工作状态 Out of service

空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

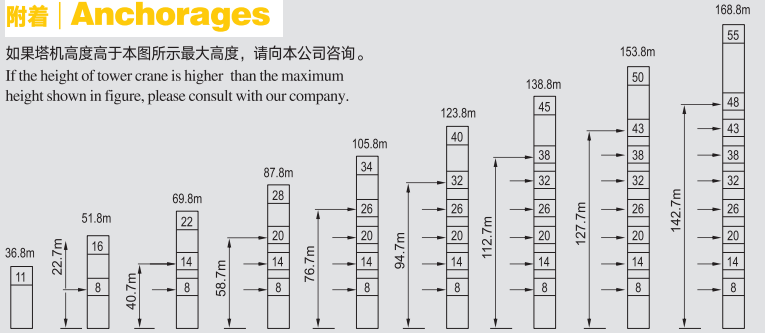

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.5~39.11	40	45	50	55	60
60m	IV	起重量 Load(t)	9	8.71	7.09	5.78	4.7	3.8
	II							

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.1~29.8	30	35	39.56	40	45	50	55
55m	IV	起重量 Load(t)	13.5	13.45	10.72	8.8	8.66	7.05	5.76	4.7
	II		9				8.86	7.25	5.96	4.9

起重臂 Jib	倍率Fall	起重幅度 Range(m)	4.7~24.29	25	30	30.32	35	40	40.32	45	50
50m	IV	起重量 Load(t)	18	17.39	13.58	13.3	10.88	8.8	8.6	7.19	5.9
	III		13.5				11.08	9	8.8	7.39	6.1
	II		9							7.59	6.3

起重臂 Jib	倍率Fall	起重幅度 Range(m)	4.3~24.54	25	30	30.66	35	40	40.87	45
45m	IV	起重量 Load(t)	18	17.59	13.78	13.3	11.06	9	8.6	7.4
	III		13.5				11.26	9.2	8.8	7.6
	II		9							7.8

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.8~24.86	25	30	31.17	35	40
40m	IV	起重量 Load(t)	18	17.92	14.1	13.3	11.36	9.3
	III		13.5				11.56	9.5
	II		9					

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.3~25.1	30	31.56	35
35m	IV	起重量 Load(t)	18	14.3	13.3	11.5
	III		13.5			11.7
	II		9			

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2.9~25.4	30
35m	IV	起重量 Load(t)	18	14.6
	III		13.5	
	II		9	

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重/Counter-weight		合计/Tatal kg
		CA	CB	
60	8.5	4800kg	2900kg	
		6	2	34600
55	8.5	6	2	34600
50	8.5	6	1	31700
45	8.5	6	1	31700
40	8.5	6		28800
35	8.5	6		28800
30	8.5	6		28800

机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism								功率/Power
		m/min	t	m/min	t	m/min	t	m	KW
起升 Hoisting	100LVF45	0-20	18	0-30	13.5	0-40	9	720	75KW
		0-40	9	0-60	6.75	0-80	4.5		
拉臂 Luffing	75DVF50	≤3min		变频调速 Ferquency control					55KW
回转 Slewing	RCV185	0-0.7r/min							2X9KW
	RVF185	0-0.7r/min		变频调速 Ferquency control					2X9KW
行走 Traveling	18TVF	0-25m/min		变频调速 Ferquency control					4X3.4KW
电网 Mains supply		CE138 ICE38							380V(±5%)/50Hz 440V(±5%)/60Hz
电力容量 Necessary electric power									205KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂 Counter-jib		8.66	5.03	5.94	7757	1
2	起升机构 Hoist Mechanism		1.95	2.14	1.04	1200	1
3	塔头 Towerhead		8.66	2.46	13.23	4929	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
4	司机室 Cabin		3.6	1.3	2.7	1032	1
5	回转支承 Slewing Table		3.79	4.69	3.84	11584	1
6	根部节 Jib-Section1		10.22	1.77	1.78	2220	1
7	起重臂第二节 Jib-Section2		10.17	1.72	1.7	1468	1
8	起重臂第三节 Jib-Section3		10.17	1.72	1.7	1468	1
9	起重臂第四节 Jib-Section4		10.17	1.72	1.7	1468	1
10	起重臂第五节 Jib-Section5		5.34	1.72	1.7	765	1
11	起重臂第六节 Jib-Section6		5.34	1.72	1.7	765	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
12	起重臂第七节 Jib-Section7		5.34	1.72	1.7	765	1
13	起重臂端部节 Jib-Section8		6.83	1.76	1.96	1319	1
14	缓冲装置 Buffer		3.52	2.66	1.47	748	1
15	吊钩 Hook		1.2	0.28	2.25	532	1
16	套架 Telescoping Cage		7.26	4.06	4.22	5478	1
17	标准节 Mast		3.31	2.13	2.11	1850	11
18	固定支脚 Fixing Angles		0.8	0.8	1.31	417	4
19	附着框 Anchorage Frame		2.75	0.67	3.0	1430	n